




SURGE PROTECTOR

3 MODE SURGE & SPIKE PROTECTOR

POWER PROTECTION

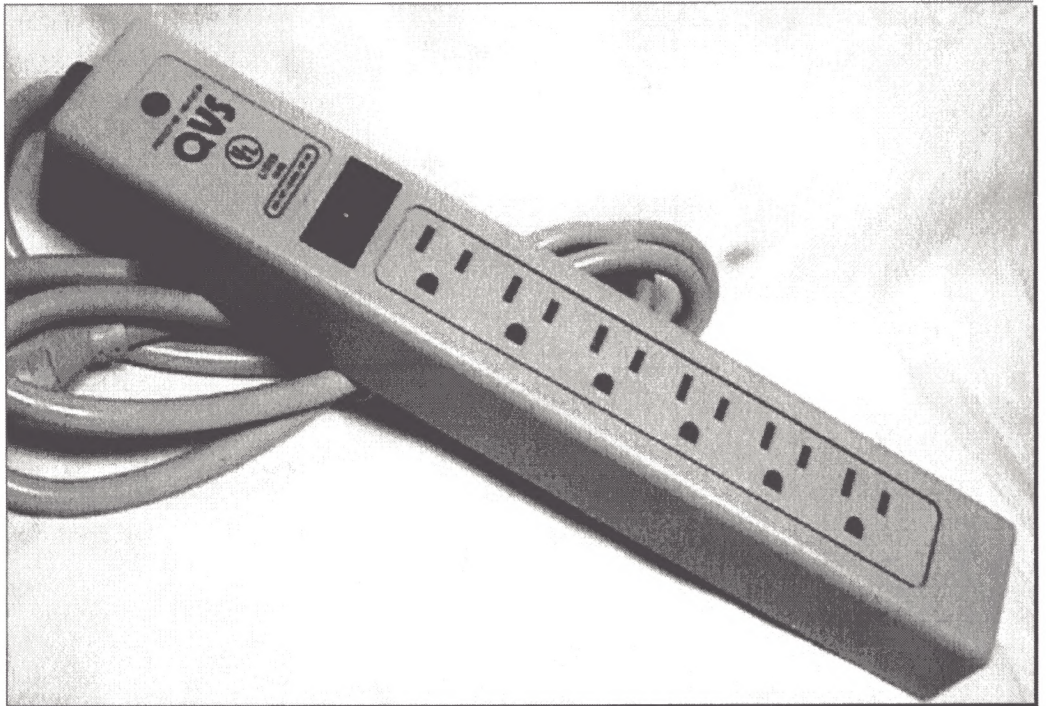

PP114C

6 OUTLETS, WITH EMI/RFI FILTERS

• Features:

UL, meets 1449, 3MOVs provide 3 mode protection
One year warranty, Resettable 15amp circuit breaker
Protection indicator light, Separate, discreet ground circuit
Plastic case, beige color, "T" slots on back for wall mount
6ft heavy duty power cord, Surge/Spike/EMI/RFI protection
Six 3-wire grounded outlets, Power ON lights rocker switch
Solder free integral bus conductors

SPECIFICATIONS

Rating - 60Hz/125vAC/15a (1875 Watts)
Maximum Surge Voltage - 6000 Volts • Maximum Spike Current - 4500amps-25°C
Energy Dissipation - 57Jx3=171J
Maximum Clamping Voltage - <330Volts • Maximum Clamping Ratio - 1.2:1
Response Time - <1 nanosecond
Temperature Range - -40°C to +80°C • Voice Rejection - 150KHz-100MHz
Attenuation - 4-35dB

VISIT US ON THE WEB @

WWW.QVS.COM